




COTTO ALLENDE TILE SPECIFICATIONS

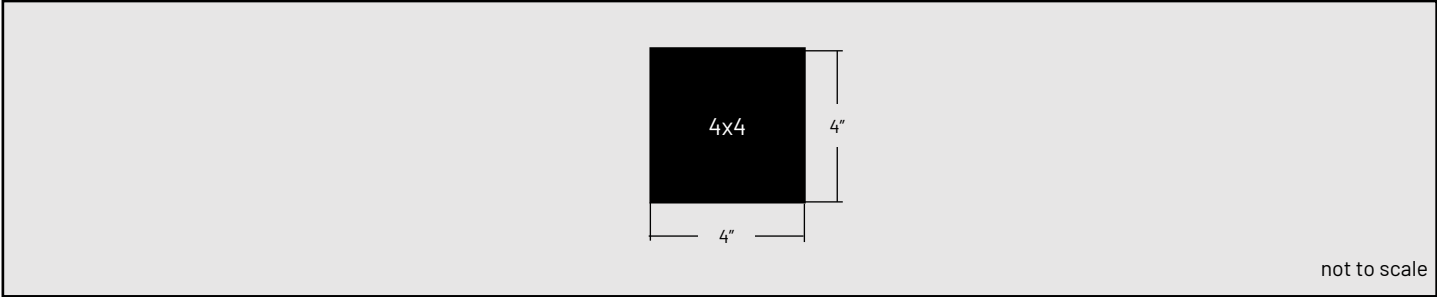

	nominal dimension	actual dimension	qty / box	sq ft / box	box dimensions	box weight
4x4	4 x 4 x 5/8 in	10 x 10 x 1.6 cm	64	8.1	10.75x9x9.25 in	46 lbs

*all Cotto Allende tiles are hand made - extreme variation in size and color should be expected from tile to tile

finish	gloss & satin	suggested grout line size	1/4"
material	clay	installation type	grout & mortar
country of origin	Mexico	placement	indoor / outdoor* <small>*with the exception of freeze/thaw</small>
		installation options	residential & commercial

Tile Performance

Moh's Hardness | ASTM C1895 - 7.5

Dynamic Coefficient Of Friction (DCOF) | ANSI A326.3 - 0.48

Breaking Strength | ASTM C648 - 977 lb_f, average

Absorption | ASTM C373 - 7.1% (non-vitreous = 7-20%)

Third party testing conducted and results provided by SGS TEC Services in accordance with ASTM and ANSI standards

Clients are responsible for hiring a skilled installer that has experience in installing terracotta tiles. Based on the product specifications and ratings provided above, consult with a licensed contractor or installer regarding the application of these tiles in your specific project and site conditions prior to installation.

Each piece of terracotta tile is made by hand, and subtle variations in color, shape and thickness are inherent with Cotto. Clients should reference Cotto Installation Instructions for additional details.