




ZELLIGE TILE MOSAIC SPECIFICATIONS

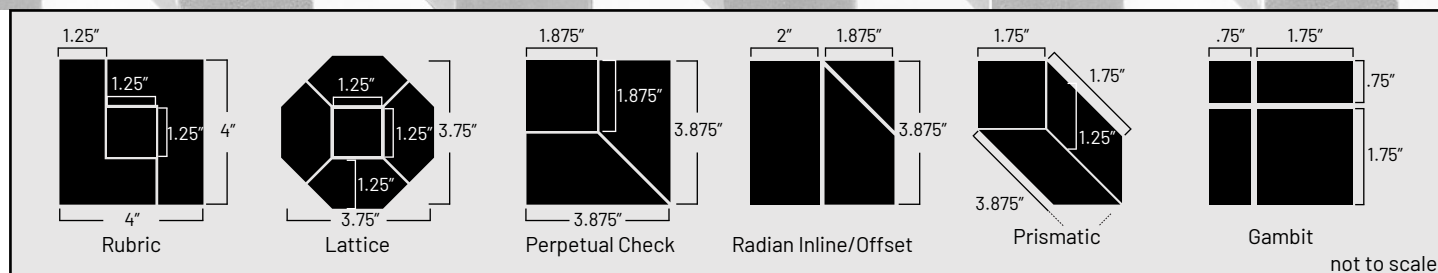

	nominal dimensions*	actual dimensions *	thickness	qty/box	sqft/box	box dimensions	box weight
Rubric	2 1/2x4 in, 1 1/4x1 1/4 in	3.25x9.5 cm, 3.5x3.5 cm	3/8 in	25 sheets	10.76	13.5 x 8.5 x 8.5 in	42 lbs
Lattice	1 1/4x2 3/4 in, 1 1/4x1 1/4 in	3.5x3.5 cm, 3.5x7 cm	3/8 in	25 sheets	10.76	13.5 x 8.5 x 8.5 in	42 lbs
Perpetual Check	2x2 in, 2x4 in	5x5 cm, 5x9.5 cm	3/8 in	25 sheets	10.76	13.5 x 8.5 x 8.5 in	42 lbs
Radian Inline/Offset	2x2 in, 2x3 3/4 in, 2x4 in	5x5 cm, 5x9.75 cm, 5x10 cm	3/8 in	25 sheets	10.76	13.5 x 8.5 x 8.5 in	42 lbs
Prismatic	1 1/4x3 3/4 in, 1 3/4x1 3/4 in	9.75x3.25 cm, 4.5x4.5 cm	3/8 in	25 sheets	10.76	13.5 x 8.5 x 8.5 in	42 lbs
Gambit	3/4x3/4 in, 1 3/4x3/4 in, 1 3/4x1 3/4 in	2x2 cm, 2x4.5 cm, 4.5x4.5 cm	3/8 in	25 sheets	10.76	13.5 x 8.5 x 8.5 in	42 lbs

All mosaic tiles are mounted on an 8x8 mesh backing. *All Zellige tiles are hand made from natural materials. Extreme variation in size and color should be expected tile to tile.

finish	all colors glazed except "Unglazed Natural"	suggested grout line size	varies by size depending on design direction
		installation type	grout & mortar
		placement	indoor / outdoor* *with the exception of freeze/thaw
material	clay	installation options	residential & commercial
country of origin	Morocco		wall , floor, backsplash, feature walls - the traditional Moroccan floor tile

Glazed Tile Performance

Moh's Hardness | ASTM C1895 - 8

Dynamic Coefficient Of Friction (DCOF) | ANSI A326.3 - 0.16

Breaking Strength | ASTM C648 - 426 lb_f, average

Absorption | ASTM C373 - 18.8%

"Unglazed Natural" ONLY Tile Performance

Moh's Hardness | ASTM C1895 - 3

Dynamic Coefficient Of Friction (DCOF) | ANSI A326.3 - 0.84

Breaking Strength | ASTM C648 - 426 lb_f, average

Absorption | ASTM C373 - 20.3% - prior to sealing

Third party testing conducted and results provided by SGS TEC Services in accordance with ASTM and ANSI standards

Clients are responsible for hiring a skilled installer that has experience in installing Zellige tiles. Based on the product specifications and ratings provided above, consult with a licensed contractor or installer regarding the application of these tiles in your specific project and site conditions prior to installation.

Each piece of Zellige tile is made by hand, and extreme variations in color, shape and thickness are inherent and to be expected. Clients should reference Zellige Installation Instructions for additional details.