




# MARBLE TILE SPECIFICATIONS

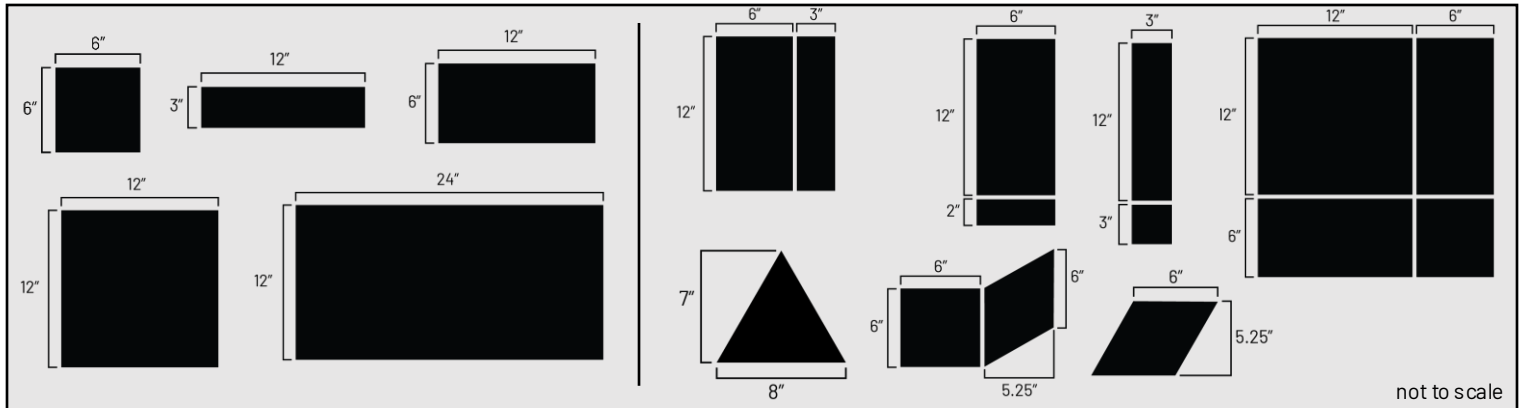

	nominal dimension*	actual dimension*	qty / box	sq ft / box	box dimensions	box weight
12x24	12 x 24 x 3/8 in	12 x 24 x 3/8 in	6	12	25 x 13 x 3 in	66
12x12	12 x 12 x 3/8 in	12 x 12 x 3/8 in	10	10	13 x 13 x 5 in	55
6x12	6 x 12 x 3/8 in	6 x 12 x 3/8 in	16	8	12 x 7 x 7 in	44
6x6	6 x 6 x 3/8 in	6 x 6 x 3/8 in	32	8	12 x 12 x 5 in	44
3x12	3 x 12 x 3/8 in	3 x 12 x 3/8 in	32	8	12 x 7 x 7 in	44
Etna	12 x 12 x 3/8 in; 6 x 12 x 3/8 in; 6 x 6 x 3/8 in	12 x 12 x 3/8 in; 6 x 12 x 3/8 in; 6 x 6 x 3/8 in	16	9	13 x 12 x 4 in	50
Verona	2 x 6 x 3/8 in; 6 x 12 x 3/8 in	2 x 6 x 3/8 in; 6 x 12 x 3/8 in	32	9.31	25 x 13 x 3 in	51
Lorenzo	3 x 12 x 3/8 in; 6 x 12 x 3/8 in	3 x 12 x 3/8 in; 6 x 12 x 3/8 in	20	7.48	25 x 13 x 3 in	56
Lucca	3 x 3 x 3/8 in; 3 x 12 x 3/8 in	3 x 3 x 3/8 in; 3 x 12 x 3/8 in	48	9	13 x 13 x 5 in	50
Piazza	12 x 12 x 3/8 in	12 x 12 x 3/8 in	10	10	13 x 13 x 5 in	55
Piazzetta	6 x 6 x 3/8 in	6 x 6 x 3/8 in	28	7	12 x 12 x 5 in	39
Lombardy	6 x 5.25 x 3/8 in; 6 x 6 x 3/8 in	6 x 5.25 x 3/8 in; 6 x 6 x 3/8 in	32	6.88	12 x 12 x 5 in	38
Diamante	6 x 5.25 x 3/8 in	6 x 5.25 x 3/8 in	30	6.5	12 x 9 x 9 in	36
Isola	8 x 8 x 8 x 3/8 in	8 x 8 x 8 x 3/8 in	28	5.4	12 x 9 x 9 in	30

finish	Honed
material	Marble
country of origin	Italy

suggested grout line size	1/16"
installation type	grout & mortar
placement	indoor / outdoor*
installation options	residential & commercial

Tile Performance	Carrara	Giallo Reale	Nero Marquina	Rosso Alicante	Grigio Carnico	Verdi Alpi
Moh's Hardness   ASTM C1895 - 5	3.5	3.5	3.5	3.5	3.0	Green = 3.5 Black = 5.5
Dynamic Coefficient Of Friction (DCOF)   ANSI A326.3	0.28	0.53	0.49	0.61	0.62	0.56
Breaking Strength   ASTM C648 *results in lb <sub>f</sub> , average	866	795	734	778	881	1,429
Absorption   ASTM C373 *all specs considered vitreous or impervious	0.15%	0.83%	0.19%	0.47%	0.17%	0.47%

Third party testing conducted and results provided by SGS TEC Services in accordance with ASTM and ANSI standards

Clients are responsible for hiring a skilled installer that has experience in installing marble tiles. Based on the product specifications and ratings provided above, consult with a licensed contractor or installer regarding the application of these tiles in your specific project and site conditions prior to installation.

Subtle color variation, veining and imperfections are inherent in natural stone and should be expected in marble tiles.