



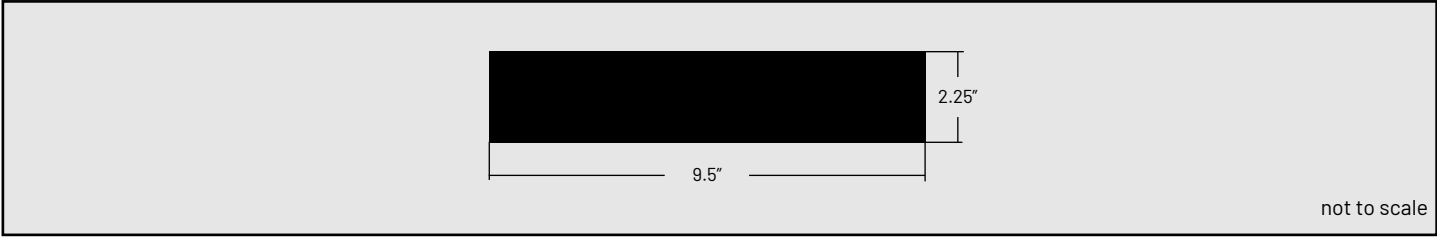

JAPANESE BRICK TILE SPECIFICATIONS

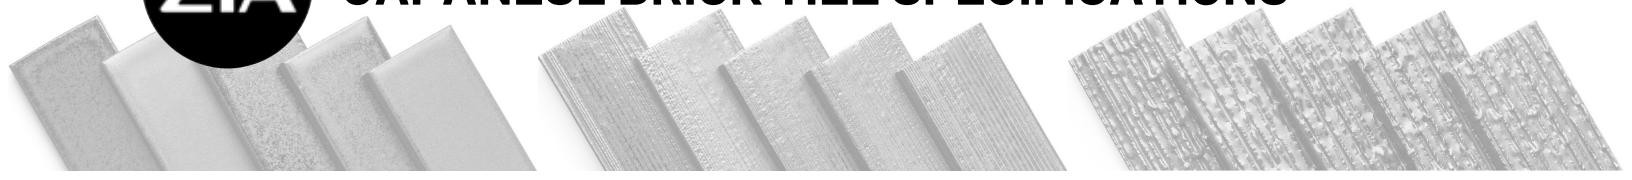

finish	nominal dimension	actual dimension	qty / box	sq ft / box	box dimensions	box weight
Flat	9.5 x 2.25 x 0.5 in	24 x 6 x 1.3 cm	66	10.23	9.5 x 8.5 x 8.75 in	49.9 lbs
Etched	9.5 x 2.25 x 0.5 in	24 x 6 x 1.3 cm	66	10.23	9.5 x 8.5 x 8.75 in	48.1 lbs
Furrowed	9.5 x 2.25 x 0.5 in	24 x 6 x 1.3 cm	66	10.23	9.5 x 8.5 x 8.75 in	48.1 lbs

finishes	Flat Etched Furrowed
material	clay
country of origin	Japan

suggested grout line size	3/16"
installation type	grout & mortar
placement	indoor / outdoor
installation options	residential & commercial

Flat Finish Tile Performance
Moh's Hardness | ASTM C1895 - 7.5
Dynamic Coefficient Of Friction (DCOF) | ANSI A326.3 - 0.40
Breaking Strength | ASTM C648 - 1,028 lb_f, average
Absorption | ASTM C373 - 1.51% (impervious- 0.5% or less)

Etched Finish Tile Performance
Moh's Hardness | ASTM C1895 - 7.5
Dynamic Coefficient Of Friction (DCOF) | ANSI A326.3 - 0.45
Breaking Strength | ASTM C648 - 915 lb_f, average
Absorption | ASTM C373 - 2.34% (impervious- 0.5% or less)

Furrowed Finish Tile Performance
Moh's Hardness | ASTM C1895 - 7.5
Dynamic Coefficient Of Friction (DCOF) | ANSI A326.3 - 0.37
Breaking Strength | ASTM C648 - 1,001 lb_f, average
Absorption | ASTM C373 - 3.02% (impervious - 0.5% or less)

Third party testing conducted and results provided by SGS TEC Services in accordance with ASTM and ANSI standards

Clients are responsible for hiring a skilled installer that has experience in installing ceramic tiles. Based on the product specifications and ratings provided above, consult with a licensed contractor or installer regarding the application of these tiles in your specific project and site conditions prior to installation.

Each piece of ceramic tile is finished by hand, and subtle variations in color may occur. Clients should reference Ceramic Tile Installation Instructions for additional details.